


EA MODULATOR INTEGRATED
1 550 nm MQW-DFB LASER DIODE MODULE
FOR 10 Gb/s DWDM APPLICATIONS**DESCRIPTION**

The NX8560LJ Series is an Electro-Absorption (EA) modulator integrated, 1 550 nm Multiple Quantum Well (MQW) structured Distributed Feed-Back (DFB) laser diode module. It is capable of transmitting up to 40 km standard single mode fiber (dispersion: 800 ps/nm) for 10 Gb/s applications with built in wavelength monitor.


FEATURES

- Integrated electroabsorption modulator
- 10 Gb/s transmission up to 40 km SSMF (dispersion: 800 ps/nm)
- Low modulation voltage
- 7-pin butterfly package with GPO™ connector
- Available for DWDM wavelengths based on ITU-T recommendations

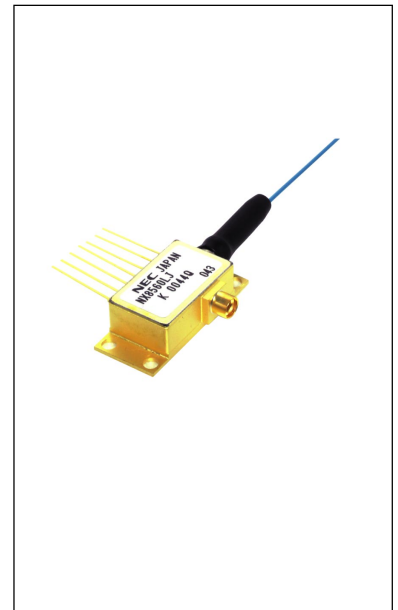


The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
Not all devices/types available in every country. Please check with local NEC Compound Semiconductor Devices representative for availability and additional information.

★ PACKAGE DIMENSIONS (UNIT: mm, unless otherwise specified ±0.2 mm)

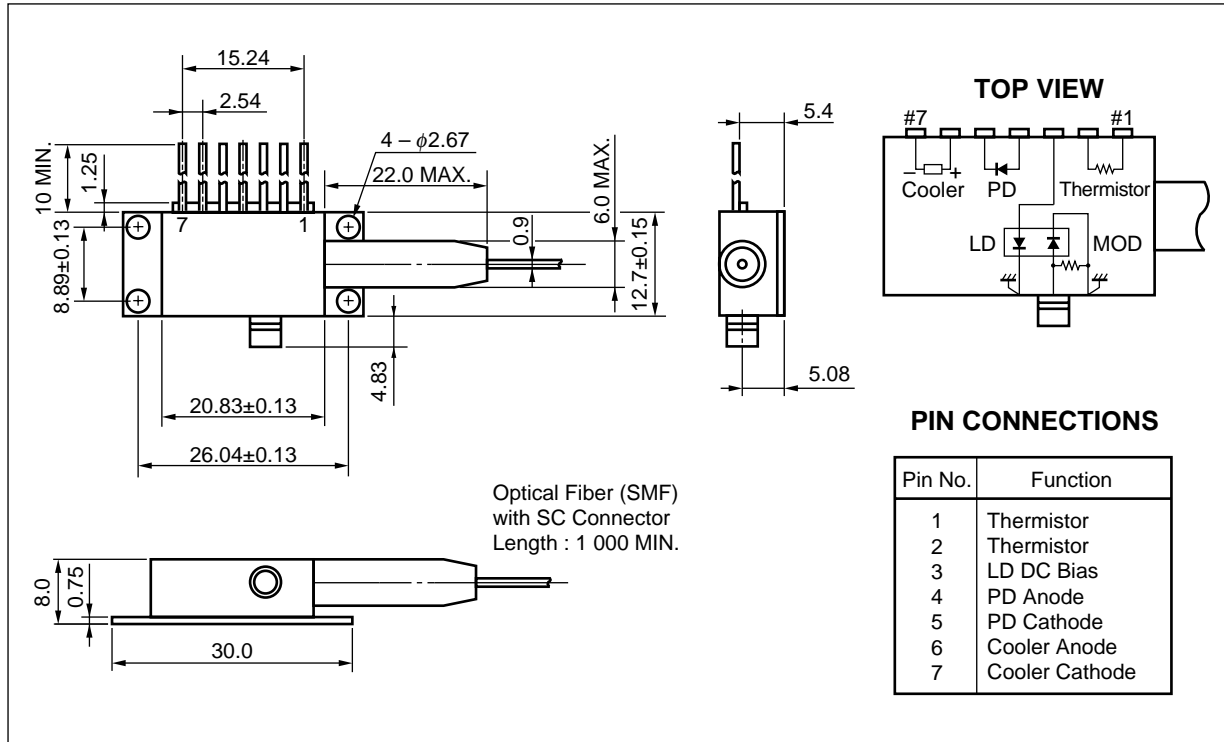

OPTICAL FIBER CHARACTERISTICS

Parameter	Specification	Unit
Mode Field Diameter	9.3±0.5	μm
Cladding Diameter	125±1	μm
Tight Buffer Diameter	900±100	μm
Cut-off Wavelength	< 1 270	nm
Attenuation 1 525 to 1 575 nm	< 0.3	dB/km
Minimum Fiber Bending Radius	30	mm
★ Fiber Length	1 000 MIN.	mm
Flammability	UL1581 VW-1	

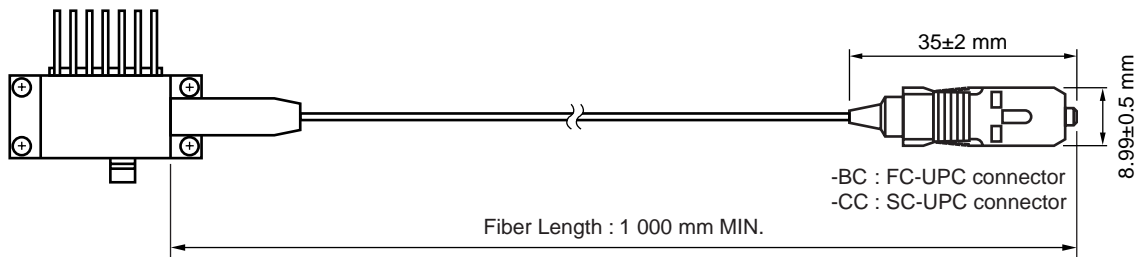

★ ORDERING INFORMATION

NX8560LJ □□□-□□

CC : SC-UPC connector (standard)
 BC : FC-UPC connector (option)

Without wavelength code : Wavelength is a certain point between
 1 528.77 to 1 563.04 nm

With wavelength code : Refer to **Table A**

★ **Table A: DWDM wavelength base on ITU-T recommendations (@ TLD = Tset)**

Wavelength Code	ITU-T Wavelength *1 (nm)	Frequency (THz)	Wavelength Code	ITU-T Wavelength *1 (nm)	Frequency (THz)
287	1528.77	196.10	501	1550.11	193.40
295	1529.55	196.00	509	1550.91	193.30
303	1530.33	195.90	517	1551.72	193.20
311	1531.11	195.80	525	1552.52	193.10
318	1531.89	195.70	533	1553.32	193.00
326	1532.68	195.60	541	1554.13	192.90
334	1533.46	195.50	549	1554.94	192.80
342	1534.25	195.40	557	1555.74	192.70
350	1535.03	195.30	565	1556.55	192.60
358	1535.82	195.20	573	1557.36	192.50
366	1536.60	195.10	581	1558.17	192.40
373	1537.39	195.00	589	1558.98	192.30
381	1538.18	194.90	597	1559.79	192.20
389	1538.97	194.80	606	1560.60	192.10
397	1539.76	194.70	614	1561.41	192.00
405	1540.55	194.60	622	1562.23	191.90
413	1541.35	194.50	630	1563.04	191.80
421	1542.14	194.40			
429	1542.93	194.30			
437	1543.73	194.20			
445	1544.52	194.10			
453	1545.32	194.00			
461	1546.11	193.90			
469	1546.91	193.80			
477	1547.71	193.70			
485	1548.51	193.60			
493	1549.31	193.50			

*1 The value which omitted and computed the 3rd place below the decimal point

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Ratings	Unit
Optical Output Power from Fiber	P_f	10	mW
Forward Current of LD	I_{FLD}	150	mA
Reverse Voltage of LD	V_{RLD}	2.0	V
Forward Voltage of Modulator	V_{FEA}	1	V
Reverse Voltage of Modulator	V_{REA}	4	V
Forward Current of PD	I_{FPD}	1	mA
Reverse Voltage of PD	V_{RPD}	10	V
Cooler Current	I_c	1.5	A
Cooler Voltage	V_c	2.5	V
Operating Case Temperature	T_c	-20 to +70	°C
Storage Temperature	T_{stg}	-40 to +85	°C
★ Lead Soldering Temperature	T_{slid}	350 (3 sec.)	°C

★ **ELECTRO-OPTICAL CHARACTERISTICS (T_{LD} = T_{set}, T_C = 25°C, BOL, unless otherwise specified)**

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Laser Set Temperature	T _{set}	*1	20		35	°C
Operating Current	I _{op}		50	60	80	mA
Modulation Center Voltage	V _{center}		-2.0		-0.5	V
Modulation Voltage	V _{mod}			2.0	3.0	V
Forward Voltage of LD	V _{FLD}	I _{FLD} = I _{op}			2.0	V
Threshold Current	I _{th}			7	20	mA
Optical Output Power from Fiber	P _t	Under modulation ²	-3	-2		dBm
Peak Emission Wavelength	λ _p	I _{FLD} = I _{op} , V _{EA} = 0 V, T _{LD} = T _{set}	1 528	ITU-T ³	1 563	nm
Side Mode Suppression Ratio	SMSR	I _{FLD} = I _{op} , V _{EA} = 0 V	30	> 37		dB
Extinction Ratio	ER	Under modulation ²	10	> 11		dB
Rise Time	t _r	20-80%, Under modulation ²			40	ps
Fall Time	t _f	80-20%, Under modulation ²			40	ps
Dispersion Penalty	DP	40 km SMF under modulation ^{2,4}			2.0	dB
Optical Isolation	I _s		23			dB
Input Return Loss	S ₁₁	I _{FLD} = I _{op} , V _{EA} = -1 V, f = 130 MHz to 5 GHz		-10	-8	dB
		I _{FLD} = I _{op} , V _{EA} = -1 V, f = 5 to 10 GHz		-8	-5	

*1 NX8560LJ Series : T_{set} is a certain point between 20 and 35°C

NX8560LJxxx Series : T_{set} is set at a certain point between 20 and 35°C for ITU-T grid wavelength

*2 40 km SMF under modulation, 9.95328 Gb/s, PRBS 2²³-1, V_{EA} = V_{center} ± 1/2V_{mod}, I_{FLD} = I_{op}, NEC Test System

V_{center} : a certain point between -2.0 and -0.5 V

V_{mod} : a certain point 3 V or below

I_{op} : a certain point between 50 and 80 mA

*3 Available for DWDM wavelengths based on ITU-T recommendations (100 GHz grid).


Please refer to **ORDERING INFORMATION**.

*4 BER = 10⁻¹⁰

★ **ELECTRO-OPTICAL CHARACTERISTICS (Applicable to Monitor PD: T_{LD} = T_{set}, T_C = -20 to +70°C)**

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Monitor Current	I _m	V _{RPD} = 5 V, I _{FLD} = I _{op} , V _{EA} = 0 V	30		1 100	μA
Dark Current	I _d	V _{RPD} = 5 V, V _{EA} = 0 V			10	nA
Terminal Capacitance	C _t	V _{RPD} = 5 V, f = 1 MHz			15	pF
Tracking Error	γ ⁻¹	I _m = const.			0.5	dB





*1 Tracking Error: γ

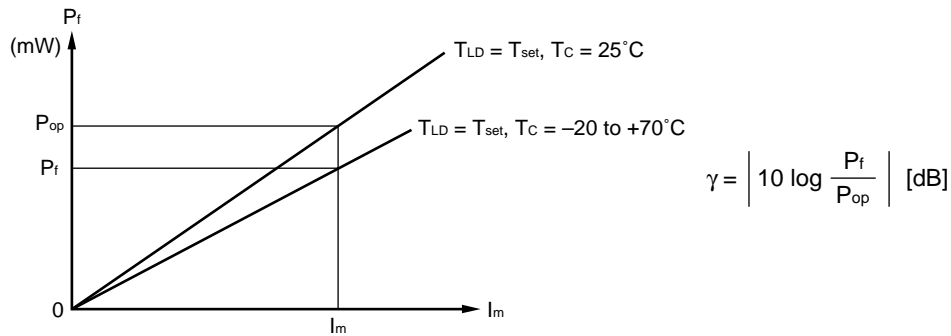

★ **ELECTRO-OPTICAL CHARACTERISTICS (Applicable to Thermistor and TEC: T_C = -20 to +70°C)**

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Thermistor Resistance	R	T _{LD} = 25°C	9.5	10.0	10.5	kΩ
B Constant	B		3 350	3 450	3 550	K
Cooler Current	I _c	T _{LD} = T _{set}			1.2	A
Cooler Voltage	V _c	T _{LD} = T _{set}			2.4	V

★ TYPICAL CHARACTERISTICS (T_{LD} = 25°C, unless otherwise specified)

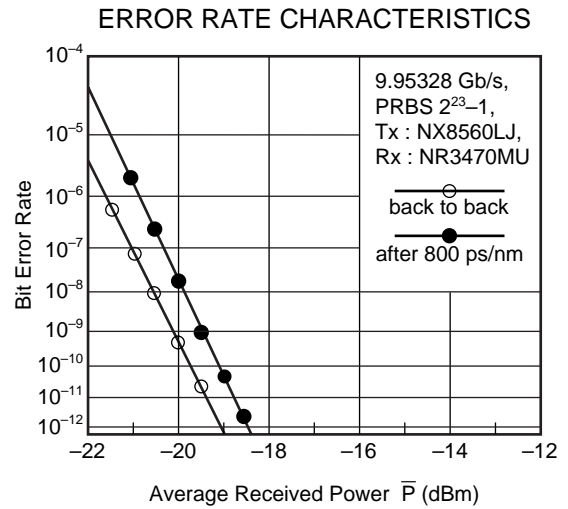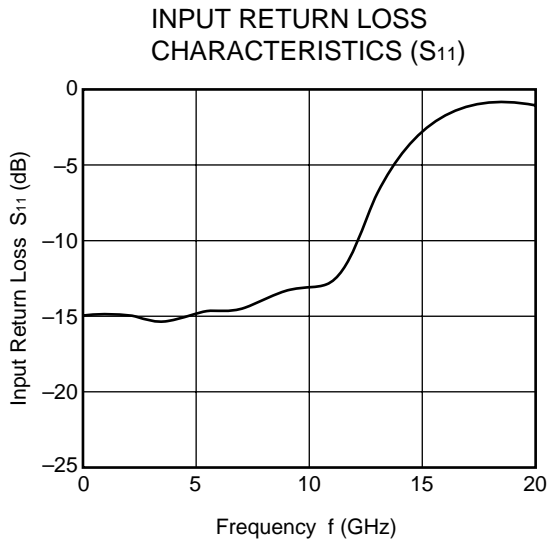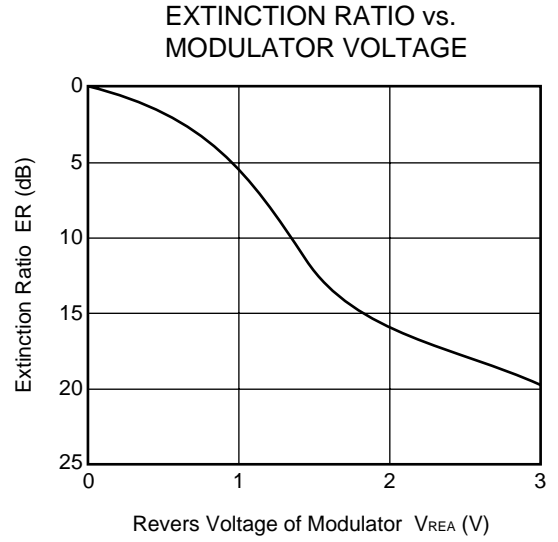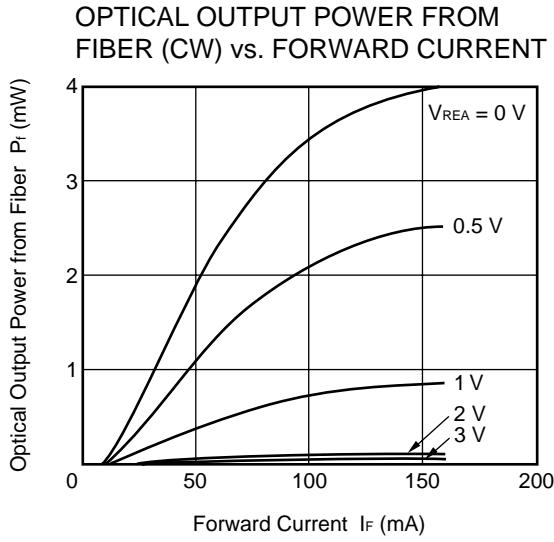

Remark The graphs indicate nominal characteristics.

★ EA MODULATOR INTEGRATED DFB-LD FAMILY

Part Number	Absolute Maximum Ratings		Electro-Optical Characteristics (T _c = 25°C)			Application	Package
	T _c (°C)	T _{stg} (°C)	I _{th} (mA)	P _r ^{*1} (mW)	λ _p (nm)		
			TYP.	MIN.	TYP.		
NX8560MC Series	0 to +75	-40 to +85	7	-1 dBm	1 550	≤ 10 Gb/s: STM-64 EA modulator integrated	19-pin mini BFY
NX8560MCS Series	0 to +75	-40 to +85	7	-5 dBm	1 550	≤ 10 Gb/s: STM-64 EA modulator integrated	19-pin mini BFY
NX8560LJ Series	-20 to +70	-40 to +85	7	-3 dBm	1 550 ^{*2}	≤ 10 Gb/s: STM-64 EA modulator integrated	BFY with GPO
NX8560SJ Series	-20 to +70	-40 to +85	7	-3 dBm	1 550 ^{*2}	≤ 10 Gb/s: STM-64 with λ monitoring PD EA modulator integrated	BFY with GPO
NX8564LE Series	-20 to +70	-40 to +85	7	-5 dBm	1 550 ^{*2}	2.5 Gb/s: STM-16, 360 km EA modulator integrated	BFY
NX8565LE Series	-20 to +70	-40 to +85	7	-5 dBm	1 550 ^{*2}	2.5 Gb/s: STM-16, 600 km EA modulator integrated	BFY
NX8566LE Series	-20 to +70	-40 to +85	7	0 dBm	1 550 ^{*2}	2.5 Gb/s: STM-16, 240 km EA modulator integrated	BFY
NX8567SA Series	-20 to +70	-40 to +85	7	-5 dBm	1 550 ^{*2}	2.5 Gb/s: STM-16, 600 km with λ monitoring PD EA modulator integrated	BFY
NX8567SAM Series	-20 to +70	-40 to +85	7	-5 dBm	1 550 ^{*2}	2.5 Gb/s: STM-16, 360 km with λ monitoring PD EA modulator integrated	BFY
NX8567SAS Series	-20 to +70	-40 to +85	7	0 dBm	1 550 ^{*2}	2.5 Gb/s: STM-16, 240 km with λ monitoring PD EA modulator integrated	BFY

*1 Under modulation

*2 Available for DWDM Wavelengths based on ITU-T recommendations

REFERENCE

Document Name	Document No.
OPTICAL SEMICONDUCTOR DEVICES FOR FIBEROPTIC COMMUNICATIONS SELECTION GUIDE	PX10161E
Opto-Electronics Devices Pamphlet	PX10160E

- **PATENT**
 USP 4,826,295
 CA 1,286,848
 EP 143 000

- **GPO is a trademark of Gilbert Engineering Co., Inc.**

- **The information in this document is current as of March, 2003. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.**
- No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
- NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC semiconductor products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment, and anti-failure features.
- NEC semiconductor products are classified into the following three quality grades:
 "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.
 "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
 "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
 "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.



The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.

(Note)

- (1) "NEC" as used in this statement means NEC Corporation, NEC Compound Semiconductor Devices, Ltd. and also includes its majority-owned subsidiaries.
- (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).

M8E 00.4-0110

SAFETY INFORMATION ON THIS PRODUCT



<p>Warning Laser Beam</p>	<p>A laser beam is emitted from this diode during operation. The laser beam, visible or invisible, directly or indirectly, may cause injury to the eye or loss of eyesight.</p> <ul style="list-style-type: none"> • Do not look directly into the laser beam. • Avoid exposure to the laser beam, any reflected or collimated beam.
<p>Caution GaAs Products</p>	<p>The product contains gallium arsenide, GaAs. GaAs vapor and powder are hazardous to human health if inhaled or ingested.</p> <ul style="list-style-type: none"> • Do not destroy or burn the product. • Do not cut or cleave off any part of the product. • Do not crush or chemically dissolve the product. • Do not put the product in the mouth. <p>Follow related laws and ordinances for disposal. The product should be excluded from general industrial waste or household garbage.</p>
<p>Caution Optical Fiber</p>	<p>A glass-fiber is attached on the product. Handle with care.</p> <ul style="list-style-type: none"> • When the fiber is broken or damaged, handle carefully to avoid injury from the damaged part or fragments.

► For further information, please contact

NEC Compound Semiconductor Devices, Ltd.

5th Sales Group, Sales Division TEL: +81-44-435-1588 FAX: +81-44-435-1579 E-mail: salesinfo@csd-nec.com

NEC Compound Semiconductor Devices Hong Kong Limited

Hong Kong Head Office TEL: +852-3107-7303 FAX: +852-3107-7309 E-mail: ncsd-hk@elhk.nec.com.hk

Taipei Branch Office TEL: +886-2-8712-0478 FAX: +886-2-2545-3859

Korea Branch Office TEL: +82-2-558-2120 FAX: +82-2-558-5209

NEC Electronics (Europe) GmbH <http://www.ee.nec.de/>

TEL: +49-211-6503-01 FAX: +49-211-6503-487

California Eastern Laboratories, Inc. <http://www.cel.com/>

TEL: +1-408-988-3500 FAX: +1-408-988-0279